


# Simultaneous acoustic energy transfer and communication in neuroscience and cardiovascular medicine

October 7 2021, by Thamarasee Jeewandara

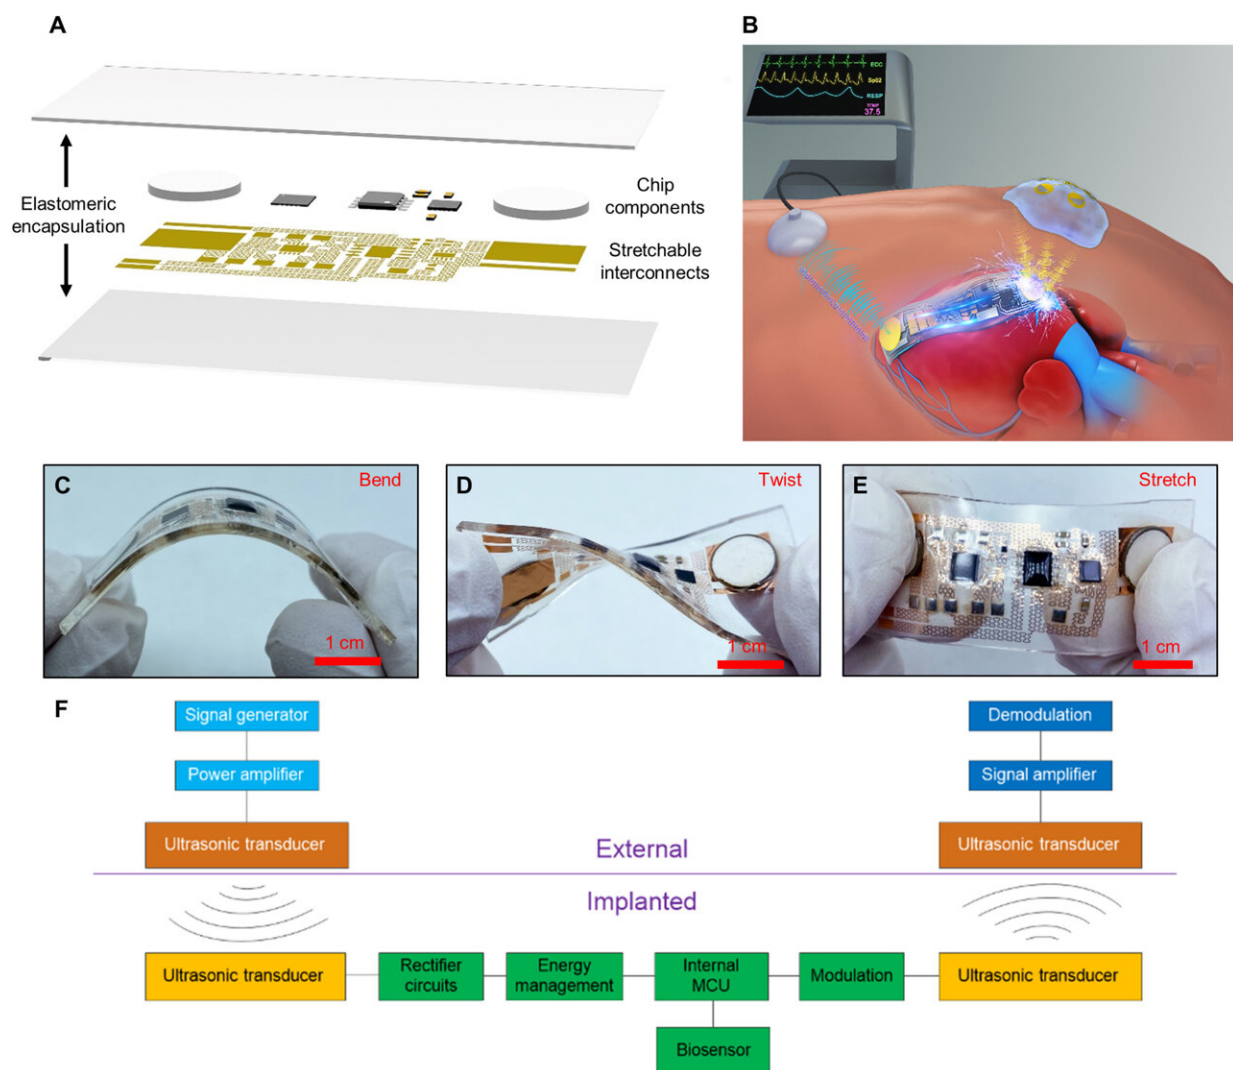

Schematic illustration of the AECD. (A) Exploded schematics of the device


structure. (B) Illustration showing the AECD function—wireless charging and communication based on ultrasound. (C) Image of the device in the bent configuration. (D) Image of the device in the twisted configuration. (E) Image of the device in the stretched configuration. (F) System schema for the AECD in use. Photo credit: Peng Jin, Tsinghua University. Credit: Science Advances, 10.1126/sciadv.abg2507

Implantable medical devices including cardiac pacemakers and brain pacemakers are increasingly prevalent, although replacing their batteries surgically is a drawback for long-term functionality and patient health. Current devices are also large and rigid, with potential discomfort to the patient post-implantation. To address this problem, Peng Jin and a research team in mechanics and electronics in Beijing China, developed a thin, battery-free and flexible implantable system for wireless recharging and communication via ultrasound. The results automatically determined abnormal heartbeats and responded by simulating the heart electrically to demonstrate the potential of the device for emerging treatments.

## Medical devices for power transfer

Implantable electronic equipment (IEE) [is vital in the medical field](#) to perform drug delivery and physiological parameter monitoring as cardiac and brain pacemakers. Implantable glucose sensors can also provide accurate, [real-time glucose monitoring](#) to assist diabetic individuals. The applications of IEE are, however, held back by shortcomings of the batteries used. A possible solution is the adoption of an implantable fuel system using endogenous substances such as [glucose to create electricity](#) via an electrochemical reaction. The power transfer method can be delivered wirelessly through tissue. To accomplish an optimal setup exceeding conventional methods of wireless power transfer and


[communication](#), Jin et al. developed an implantable acoustic [energy](#) transfer and communication [device](#) (AECD). The flexible electronic technology-based device was soft, comfortable and well-adapted to the human biological structure, as a stretchable ultrasonic device for ultrasonic energy transfer and efficient communication.

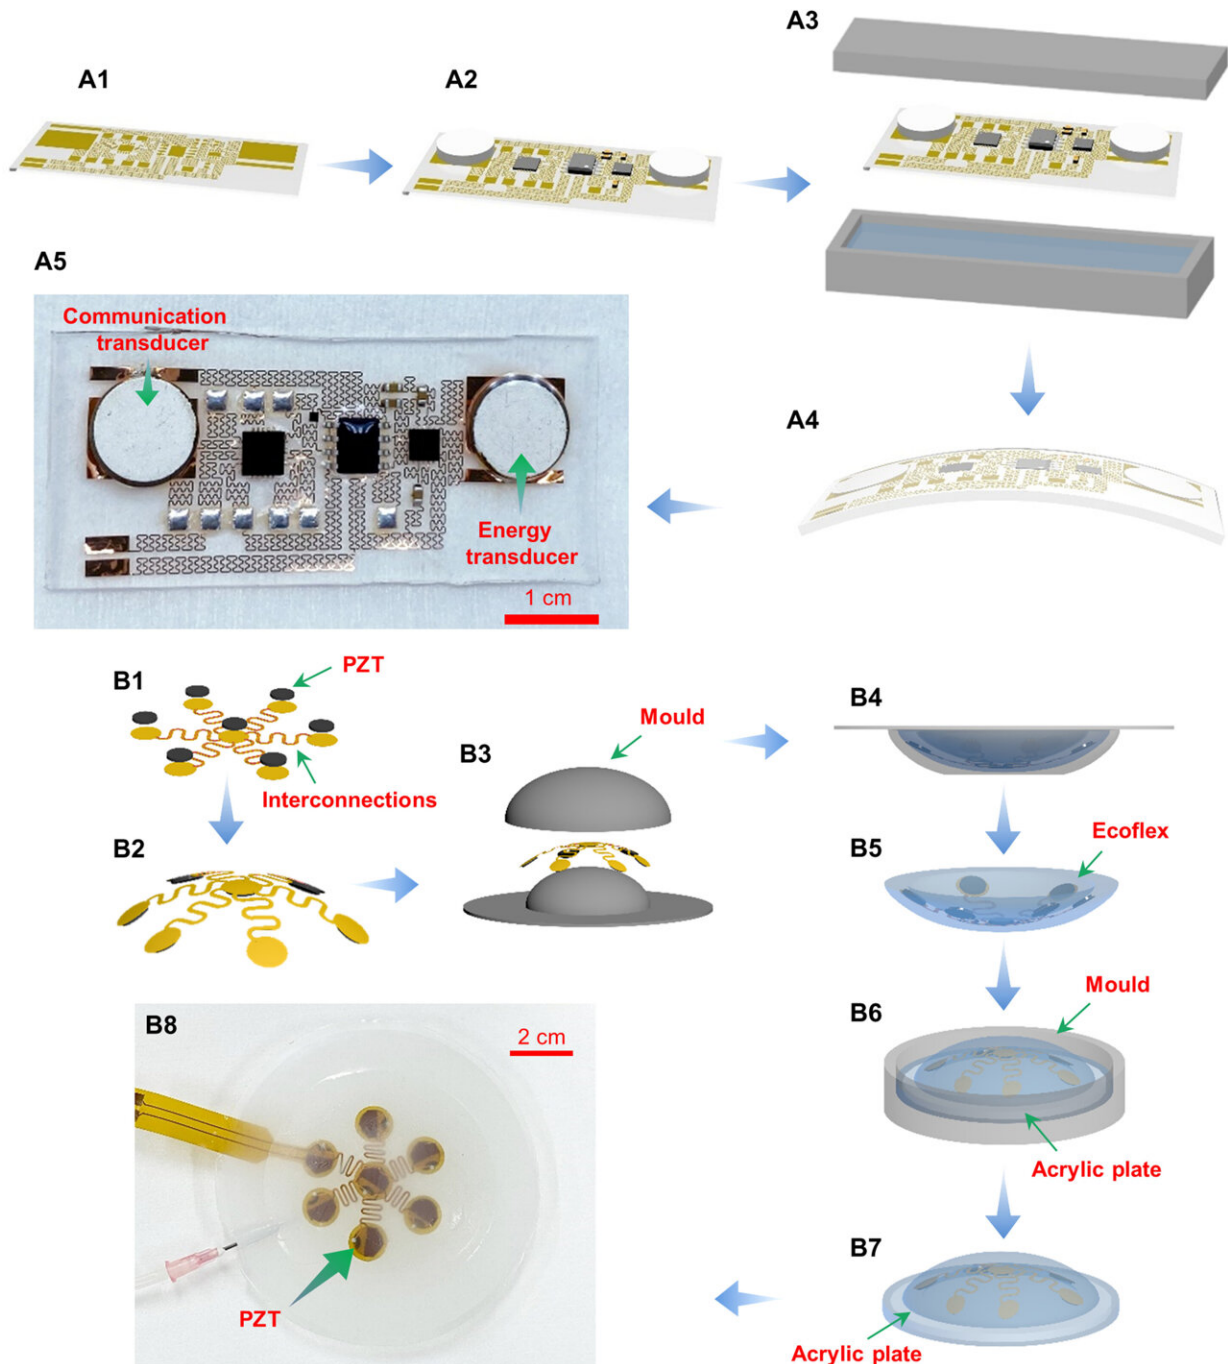

Manufacturing process. (A) Steps in manufacturing the AECD. (B) Steps in manufacturing the external energy–transmitting equipment. Photo credit: Peng Jin, Tsinghua University. Credit: Science Advances, 10.1126/sciadv.abg2507

## Device design

To build the AECD, the scientists incorporated a fractal serpentine copper pattern placed on a [polyimide](#) pattern layer, where the circuit interconnected between chip components. The researchers encapsulated all the components in a soft [polydimethylsiloxane](#) (PDMS) layer to make the AECD soft, flexible, and accommodating without altering its function. They verified the flexibility of the device with repeated mechanical testing to minimize the damage and inflammatory response in the human body after implantation. The entire system achieved wireless energy transfer and wireless communication via ultrasound. To achieve this, the team integrated five modules and upon implantation, the AECD [ultrasonic transducer](#) accepted the ultrasound transmitted by the rectifier module and the energy management module to power the control unit. After activation, the unit collected physiological information via biosensors to then transmit information-coded ultrasound, which an external ultrasound system then received to recover the physiological information. For example, the AECD functioned as an implantable heart monitoring device to wirelessly monitor the heart's health via ultrasound.

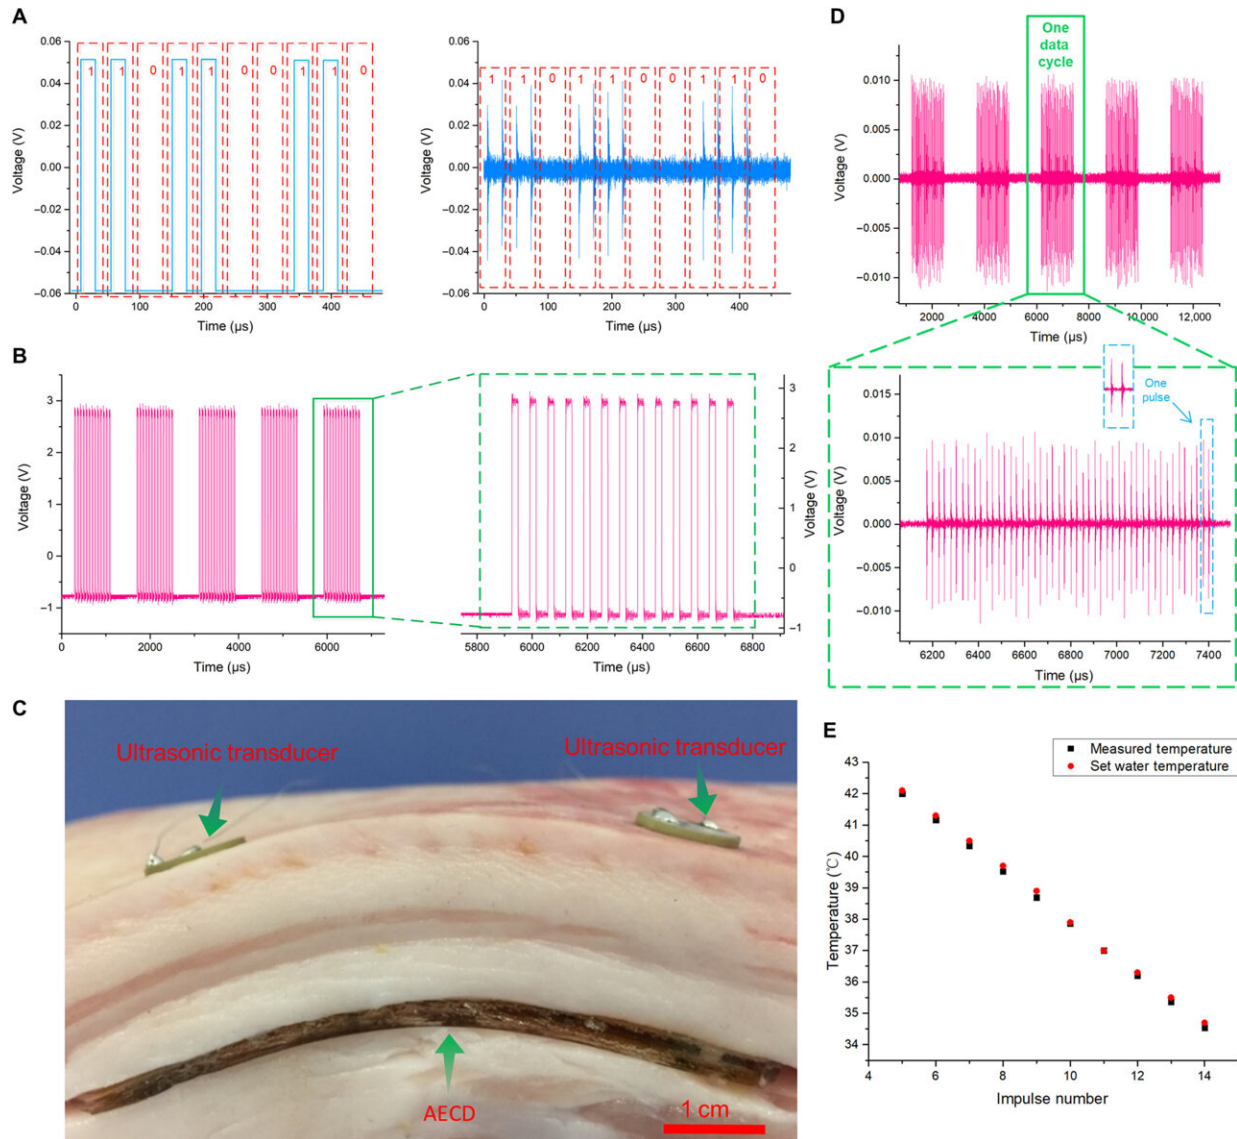

Ultrasonic focusing method achieved by changing the geometry of the flexible base. (A) Ultrasonic transmission using a few ultrasonic transducers. (B) Ultrasonic transmission by a tiled array of ultrasonic transducers. (C) Ultrasonic transmission by an array of ultrasonic transducers placed inside the top part of a flexible base. (D) Adjusting the ultrasonic focusing position by changing the curvature of the flexible base upper surface. (E) Deformation process of the flexible base while injecting water. (F) Deformation process of the flexible base during the experiment. (G) Experimental results for the received P-P voltage with different arc heights, normalized by 60 mV, which is the received P-P voltage when the arc height was 0 mm. (H) Description of geometric relation



variables and reception position. (I) Acoustic power in a fixed reception position with different arc heights and ultrasonic transmission frequencies during a simulation. (J) Acoustic pressure level distribution during the deformation process of the flexible ultrasonic launcher during a simulation. Photo credit: Peng Jin, Tsinghua University. Credit: Science Advances, 10.1126/sciadv.abg2507


## **Developmental process**

To build the AECD, Jin et al. used a two-step manufacturing process: First, they established the circuit and then packaged it. The researchers also specially designed external energy-transmitting equipment to transmit ultrasound and provide energy to the acoustic energy transfer and communication device (AECD). The entire process of AECD manufacture included a three-step process. The next process of external energy-transmitting equipment (EETE) development comprised of an array of ultrasonic transducers and the implantation of the completed device into a flexible base. Jin et al. then created the ultrasonic array using an ultrathin, flexible, printed circuit produced using an identical flexible printed circuit technology.

## **Wireless energy transfer**

The researchers achieved wireless power transfer via an acoustic method by converting mechanical to electrical energy. To achieve this, they transmitted ultrasound to the AECD receiver in vitro, then the AECD ultrasonic accepted the ultrasound and converted it to electrical energy in vivo. The AECD energy management then supplied energy to the entire internal electronic system. The scientists used many small transducers in an array to prevent acoustic scattering for efficient power transfer and developed a centralized symmetric curved design to focus ultrasound on

a specific point in the central line and implanted it in a flexible base made of silicone. They then developed a centralized symmetric curved design to focus ultrasound on a specific point in the central line and implanted it in a flexible base made of silicon and confirmed the feasibility of the proposed method using acoustic simulations.

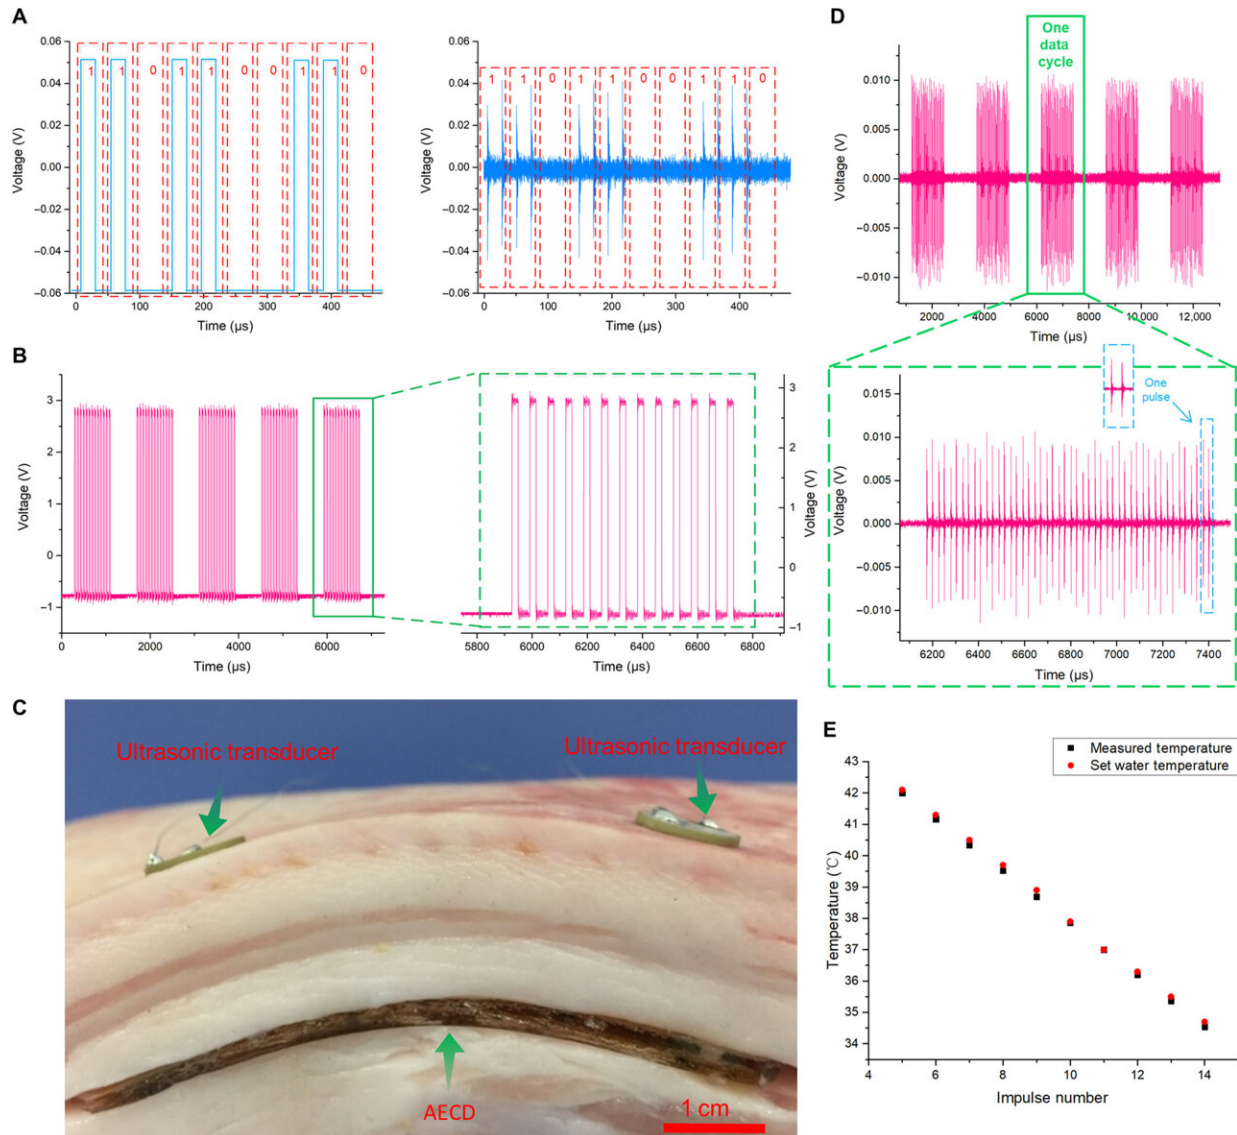


Mechanism and experiment to prove successful ultrasonic wireless communication based on ultrasound. (A) Binary modulation method. (B) Pulse number modulation method. (C) Experiment designed to show that the AECD

could accept ultrasound transmitted across biological tissue. (D) Temperature information–coded ultrasound showing that the AECD was activated by ultrasound and began to transmit measured temperature data after accepting ultrasound from outside the biological tissue. (E) AECD temperature monitoring experiment result. Photo credit: Peng Jin, Tsinghua University. Credit: Science Advances, 10.1126/sciadv.abg2507

## **Wireless communication**

Using the acoustic energy transfer and communication device (AECD), Jin et al. transmitted information-coded ultrasound to achieve ultrasound-based wireless communication. In its working state, a biological sensor acquired physiological information and then regulated the information into the corresponding pulse signal. Simultaneously, an external ultrasonic transducer accepted the [ultrasound](#) and converted it to a voltage signal. The team then demodulated and recovered the voltage signal undergoing amplification and filtration to recover it via a computer to obtain internal physiological information. Thereafter they facilitated wireless acoustic communication using a special signal modulation and demodulation technique. The team conducted experiments to directly show the function of the AECD during simultaneous acoustic energy transfer and communication in biological environments using a piece of fresh meat and a water heating device to measure their inherent temperatures using the described method.



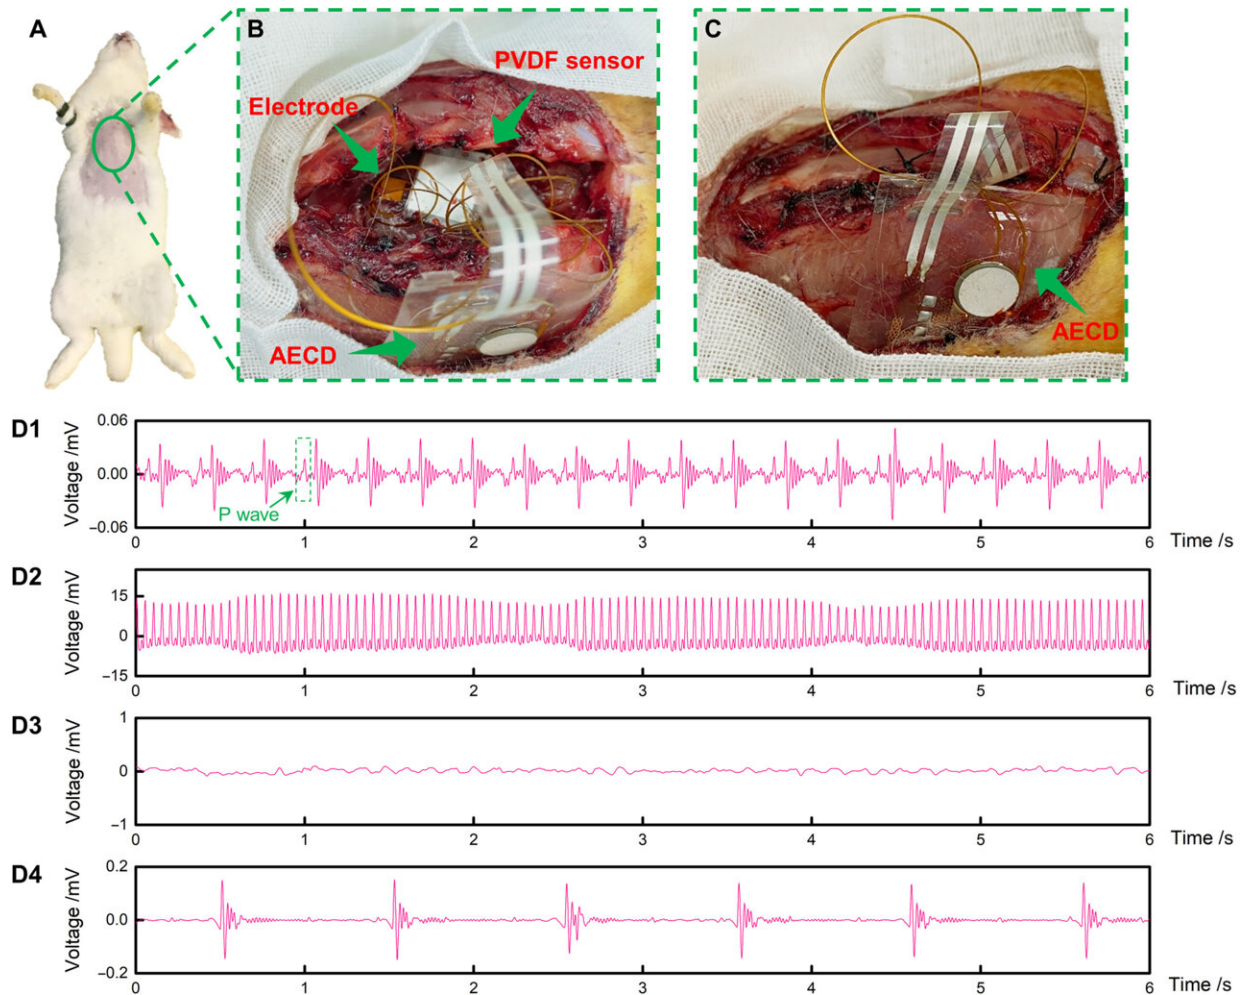

Cardiac pacing experiment to prove the AECD ability to serve as a cardiac pacemaker. (A) Experimental animal. (B) Fixing the AECD, sensors, and electrodes. The top arrow shows the PVDF, the middle arrow shows the electrode, and the bottom arrow shows the AECD. (C) Suturing the rabbit's chest. (D1) Rabbit's regular heartbeat using ultrasound to power the AECD. (D2) Rabbit ECG, when using a high-voltage AC directly to stimulate the heart to cause cardiac arrest. (D3) Rabbit ECG to confirm that cardiac arrest was initiated successfully. (D4) Rabbit ECG shows that the AECD, powered by ultrasound, successfully detected abnormal heartbeats and stimulated the heart. Photo credit: Peng Jin, Tsinghua University. Credit: Science Advances, 10.1126/sciadv.abg2507

## Cardiac pacing experiments and outlook

The versatile implantable electronic equipment device developed in this work functioned in many areas as a heart pacemaker and nerve stimulator. As proof-of-concept, Jin et al. conducted a cardiac pacing experiment with a rabbit animal model. During the experiment, they implanted the AECD inside the subcutaneous tissue of a rabbit's chest and recorded the electrocardiogram (ECG) and monitored the heartbeat to indicate the normal heart rhythm of the rabbit. The device also indicated its capacity to detect abnormal heartbeats.

In this way, Peng Jin and colleagues developed a flexible implantable platform based on an acoustic method for wireless power transfer and wireless communication. The team improved the acoustic intensity for wireless power transfer and showed highly consistent results for the experiments and acoustic simulations. They improved the flexibility of the acoustic energy transfer and communication device (AECD) and used in vivo animal experiments to show its role as a cardiac pacemaker capable of monitoring the heartbeat state. During abnormal heart rhythms, the device responded by electrically stimulating the heart as emergent treatment. The device can be optimized to treat and normalize the function of other organs such as the bladder and rectify physiological abnormalities.

**More information:** Peng Jin et al, A flexible, stretchable system for simultaneous acoustic energy transfer and communication, *Science Advances* (2021). [DOI: 10.1126/sciadv.abg2507](https://doi.org/10.1126/sciadv.abg2507)

Dae-Hyeong Kim et al, Dissolvable films of silk fibroin for ultrathin conformal bio-integrated electronics, *Nature Materials* (2010). [DOI: 10.1038/nmat2745](https://doi.org/10.1038/nmat2745)

Chonghe Wang et al, Monitoring of the central blood pressure waveform

via a conformal ultrasonic device, *Nature Biomedical Engineering* (2018).  
[DOI: 10.1038/s41551-018-0287-x](https://doi.org/10.1038/s41551-018-0287-x)

© 2021 Science X Network

Citation: Simultaneous acoustic energy transfer and communication in neuroscience and cardiovascular medicine (2021, October 7) retrieved 8 May 2024 from  
<https://medicalxpress.com/news/2021-10-simultaneous-acoustic-energy-neuroscience-cardiovascular.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.